

SECTION 1: IDENTIFICATION**Product Identifier****Product Form:** Mixture**Product Name:** BITEC Asphalt Primer 41**Product Code:** F02482**Intended Use of the Product**

Acrylic Elastomeric Primer

Name, Address, and Telephone of the Responsible Party**Manufacturer**

BITEC, Inc.

#2 Industrial Park Drive

Morrilton, AR 72110

T-800-535-8597

F-501-354-3019

www.bitec.com

Emergency Telephone Number**Emergency Number:** 1-800-535-8597**SECTION 2: HAZARDS IDENTIFICATION****Classification of the Substance or Mixture****Classification (GHS-US)**

Flam. Liq. 3	H226
Asp. Tox. 1	H304
Skin Irrit. 2	H315
Eye Irrit. 2A	H319
STOT SE 3	H336
Mutagenicity, 1B	H340
Carc., 1A	H350
Repr. 2	H361
Aquatic Acute 1	H400
Aquatic Chronic 1	H410

Label Elements**GHS-US Labeling****Hazard Pictograms (GHS-US)**

:



GH502



GH507



GH508

Signal Word (GHS-US)

: Danger

Hazard Statements (GHS-US):
H226 – Flammable liquid and vapor.
H304 – May be fatal if swallowed and enters airways
H315 – Causes skin irritation.
H319 – Causes serious eye irritation.
H336 – May cause drowsiness or dizziness.
H340 – May cause genetic defects.
H350 – May cause cancer.
H361 – Suspected of damaging fertility or the unborn child.
H400 – Very toxic to aquatic life.
H410 – Very toxic to aquatic life with long lasting effects.**Precautionary Statements (GHS-US)**:
P201 – Obtain special instructions before use.
P202 – Do not handle until all safety precautions have been read and understood.
P210 – Keep away from heat/sparks/open flames/hot surfaces. –no smoking.
P233 – Keep container tightly closed.
P240 – Ground/bond container and receiving equipment.
P241 – Use explosion-proof electrical/ventilating/lighting equipment.
P242 – Use only non-sparking tools.
P243 – Take precautionary measures against static discharge.

BITEC Asphalt Primer 41

Safety Data Sheet

According to Federal Register/Vol. 77, No. 58/Monday, March 26, 2012/Rules and Regulations

P264 – Wash hands, forearms, and other exposed areas thoroughly after handling.
P271 – Use only outdoors or in a well-ventilated area.
P273 – Avoid release to the environment.
P280 – Wear protective gloves/protective clothing/eye protection/face protection.
P312 – Call a doctor, a POISON CENTER if you feel unwell.
P301+P310 – IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician.
P302+P352 – If on skin: Wash with plenty of water.
P303+P361+P353 – IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower.
P305+P351+P338 – IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308+P313 – If exposed or concerned: Get medical advice/attention.
P331 – Do NOT induce vomiting.
P337+P313 – If eye irritation persists: Get medical advice/attention.
P370+P378 – In case of fire: use appropriate media to extinguish.
P391 – Collect spillage.
P403+P235 – Store in a well-ventilated place. Keep cool.
P405 – Store locked up.
P501 – Dispose of contents/container according to local, regional, national, and international regulations.

Other Hazards

Other Hazards Not Contributing to the Classification: Exposure may aggravate those with pre-existing eye, skin, or respiratory conditions.

Unknown Acute Toxicity (GHS-US)

No data available

SECTION 3: COMPOSITION/INFORMATION ON INGREDIENTS

Mixture

Name	Product identifier	% (w/w)	Classification (GHS-US)
Stoddard solvent	(CAS No) 8052-41-3	30-60	Flam. Liq. 3, H226 Eye irrit. 2A, H319 Asp. Tox. 1, H304 Aquatic Acute 1, H400 Aquatic Chronic 1, H410
Petroleum Asphalt	(CAS No) 8052-42-4	15 - 40	Flam. Liq. 2, H225 Eye Irrit. 2A, H319 Carc. 2, H351
Petroleum Naphtha, light aromatic	(CAS No) 64742-95-6	7 - 13	Flam. Liq. 1, H224 Skin Irrit. 2, H315 Muta 1B, H340 Carc. 1B, H350 Repr. 2, H361 STOT SE 3, H336 Asp. Tox. 1, H304 Aquatic Acute 2, H401 Aquatic Chronic 2, H411
Hydrocarbon Resin	(CAS No) 68478-07-9	7 - 13	Flam. Liq. 1, H224 Skin irrit. 2, H315 Muta. 1B, H340 Carc. 1B, H350 Repr. 2, H361 STOT SE 3, H336
1,3,5-Trimethylbenzene	(CAS No) 108-67-8	1-5	Flam. Liq. 3, H226 Acute Tox. 4, H334 Skin Irrit. 2, H315

BITEC Asphalt Primer 41

Safety Data Sheet

According to Federal Register/Vol. 77, No. 58/Monday, March 26, 2012/Rules and Regulations

			Eye Irrit. 2, H319 STOT SE 3, H335 Aquatic Chronic 2, H411
Hydrogen Sulfide	(CAS No) 7783-06-4	1-5	Flam. Gas 1, H220 Liquefied gas, H280 Acute Tox. 2 (Inhalation:gas), H330 Eye Irrit. 2A, H319 STOT SE 3, H335 Aquatic Acute 1, H400
1,2,4-trimethylbenzene	(CAS No) 95-63-6	1-5	Flam. Liq. 3, H226 Acute Tox. 4 (Inhalation: Vapor), H332 Skin Irrit. 2, H315 Eye Irrit. 2A, H319 Carc. 2, H351 STOT SE 3, H335 Asp. Tox. 1, H304 Aquatic Acute 2, H401 Aquatic Chronic 2, H411

Full text of H-Phrases: See Section 16

SECTION 4: FIRST AID MEASURES

Description of First Aid Measures

First-aid Measures General: Never give anything by mouth to an unconscious person. If you feel unwell, seek medical advice (show the label where possible). If exposed or concerned: Get medical advice/attention.

First-aid Measures After Inhalation: When symptoms occur: go into open air and ventilate suspected area. If exposed or concerned: Get medical advice/attention.

First-aid Measures After Skin Contact: Immediately flush skin with plenty of water. Remove contaminated clothing. Get medical attention immediately. Wash clothing separately before reuse.

First-aid Measures After Eye Contact: Immediately flush eyes with plenty of tempered water (at least 15-20 minutes) lifting upper and lower eye lids occasionally. Get immediate medical attention.

First-aid Measures After Ingestion: Rinse mouth. Do NOT induce vomiting. IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician.

Most Important Symptoms and Effects, Both Acute and Delayed

General: May be fatal if swallowed and enters airways. Causes serious eye irritation. Causes skin irritation.

Symptoms/Injuries After Inhalation: May cause cancer by inhalation.

Symptoms/Injuries After Skin Contact: May cause skin irritation.

Symptoms/Injuries After Eye Contact: Causes eye irritation.

Symptoms/Injuries After Ingestion: May be fatal if swallowed and enters airways.

Chronic Symptoms: May cause genetic defects. May cause cancer.

Indication of Any Immediate Medical Attention and Special Treatment Needed

If medical advice is needed, have product container or label at hand.

SECTION 5: FIRE-FIGHTING MEASURES

Extinguishing Media

Suitable Extinguishing Media: Use extinguishing media appropriate for surrounding fire.

Unsuitable Extinguishing Media: Do not use water jet. Use of heavy stream of water may spread fire.

Special Hazards Arising from the Substance or Mixture

Fire Hazard: Flammable liquid and vapor.

Explosion Hazard: May form flammable/explosive vapor-air mixture.

Reactivity: Hazardous reactions will not occur under normal conditions.

Advice for Firefighters

Firefighting Instructions: Exercise caution when fighting any chemical fire.

Protection During Firefighting: Do not enter fire area without proper protective equipment, including respiratory protection.

Hazardous Combustion Products: Carbon dioxide, carbon monoxide, smoke, fumes, unburned hydrocarbons and oxides of sulfur and/or nitrogen. Hydrogen sulfide and other sulfur-containing gases can evolve from this product particularly at elevated temperatures. Corrosive vapors.

Reference to Other Sections

Refer to section 9 for flammability properties.

SECTION 6: ACCIDENTAL RELEASE MEASURES

Personal Precautions, Protective Equipment and Emergency Procedures

BITEC Asphalt Primer 41

Safety Data Sheet

According to Federal Register/Vol. 77, No. 58/Monday, March 26, 2012/Rules and Regulations

General Measures: Use special care to avoid static electric charges. Keep away from heat/sparks/open flames/hot surfaces. No smoking. Avoid breathing vapor, mist, spray. Use only outdoors or in a well-ventilated area. Handle in accordance with good industrial hygiene and safety practice.

For Non-emergency Personnel

Protective Equipment: Use appropriate personal protection equipment (PPE).

Emergency Procedures: Evacuate unnecessary personnel.

For Emergency Responders

Protective Equipment: Equip cleanup crew with proper protection. Use proper PPE.

Emergency Procedures: Ventilate area. Evacuate unnecessary personnel. Eliminate ignition sources. Stop leak if safe to do so. Prevent entry to sewers and public waters.

Environmental Precautions

Prevent further leakage or spillage if safe to do so. Prevent product from entering drains.

Methods and Material for Containment and Cleaning Up

For Containment: Absorb and/or contain spill with inert material. Do not take up in combustible material such as: saw dust or cellulosic material.

Methods for Cleaning Up: Collect spillage. Clear up spills immediately and dispose of waste safely.

Reference to Other Sections

See heading 8, Exposure Controls and Personal Protection.

SECTION 7: HANDLING AND STORAGE

Precautions for Safe Handling

Precautions for Safe Handling: Handle empty containers with care because residual vapors are flammable. Contains Sulfur, may release small amounts of hydrogen sulfide. Hydrogen sulfide is a highly flammable, explosive gas under certain conditions, is a toxic gas, and may be fatal. Gas can accumulate in the headspace of closed containers, use caution when opening sealed containers. Heating the product or containers can cause thermal decomposition of the product and release hydrogen sulfide.

Hygiene Measures: Handle in accordance with good industrial hygiene and safety procedures. Wash hands and other exposed areas with mild soap and water before eating, drinking, or smoking and again when leaving work. Contaminated work clothing should not be allowed out of the workplace.

Conditions for Safe Storage, Including Any Incompatibilities

Technical Measures: Proper grounding procedures to avoid static electricity should be followed. Ground/bond container and receiving equipment. Use explosion-proof electrical, lighting, ventilating equipment.

Storage Conditions: Keep in properly labeled containers. Keep tightly closed in a cool dry well-ventilated place. Use explosion-proof electrical, lighting, and ventilating equipment.

Incompatible Materials: Strong acids, strong bases. Strong oxidizers.

Storage Area: Store locked up. Store in a well-ventilated place.

Specific End Use(s)

Liquid Waterproofing Membrane

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

Control Parameters

Petroleum Asphalt (8052-42-4)		
USA ACGIH	ACGIH TWA (mg/m ³)	0.5 mg/m ³
USA NIOSH	NIOSH REL (TWA) (mg/m ³)	5 mg/m ³
Ontario	OEL TWA (mg/m ³)	0.5 mg/m ³

Hydrogen Sulfide (7783-06-4)		
USA ACGIH	ACGIH TWA (ppm)	1 ppm
USA ACGIH	ACGIH STEL (ppm)	5 ppm
USA NIOSH	NIOSH REL (ceiling) (mg/m ³)	15 mg/m ³
USA NIOSH	NIOSH REL (ceiling) (ppm)	10 ppm
USA OSHA	OSHA PEL (ceiling)(ppm)	20 ppm
USA IDLH	US IDLH (ppm)	100 ppm
Ontario	OEL TWA (ppm)	10 ppm
Ontario	OEL STEL (ppm)	15 ppm

BITEC Asphalt Primer 41

Safety Data Sheet


According to Federal Register/Vol. 77, No. 58/Monday, March 26, 2012/Rules and Regulations

Stoddard solvent (8052-41-3)		
Mexico	OEL TWA (mg/m ³)	523 mg/m ³
Mexico	OEL TWA (ppm)	100 ppm
Mexico	OEL STEL (mg/m ³)	1050 mg/m ³
Mexico	OEL STEL (ppm)	200 ppm
USA ACGIH	ACGIH TWA (ppm)	100 ppm
USA OSHA	OSHA PEL (TWA) (mg/m ³)	2900 mg/m ³
USA OSHA	OSHA PEL (TWA) (ppm)	500 ppm
USA NIOSH	NIOSH REL (TWA) (mg/m ³)	350 mg/m ³
USA NIOSH	NIOSH REL (ceiling) (mg/m ³)	1800 mg/m ³
USA IDLH	US IDLH (mg/m ³)	20000 mg/m ³
Ontario	OEL TWA (mg/m ³)	525 mg/m ³ (140°C Flash aliphatic solvent)
1,3,5-trimethylbenzene (108-67-8)		
USA NIOSH	NIOSH REL (TWA) (mg/m ³)	125 mg/m ³
USA NIOSH	NIOSH REL (TWA) (ppm)	25 ppm
1,2,4-trimethylbenzene (95-63-6)		
USA NIOSH	NIOSH REL (TWA) (mg/m ³)	125 mg/m ³
USA NIOSH	NIOSH REL (TWA) (ppm)	25 ppm

Exposure Controls

Appropriate Engineering Controls: Proper grounding procedures to avoid static electricity should be followed. Use explosion-proof equipment. Take precautionary measures against static discharges. Ensure all national/local regulations are observed. Gas detectors should be used when flammable gases/vapors may be released.

Personal Protective Equipment: Gloves. Protective clothing. Protective goggles. Insufficient ventilation: wear respiratory protection.

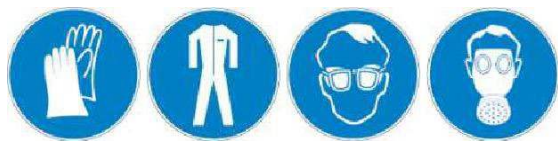

Hand Protection: Protective gloves.

Eye Protection: Chemical goggles or safety glasses.

Skin and Body Protection: Wear suitable protective clothing.

Respiratory Protection: When manufacturing or handling product in large quantities and vapors or mists may be generated, maintain airborne concentrations below recommended limits. Workplace risk assessments should be completed before specifying and implementing respirator usage. NIOSH approved respirators for protection should be used if respirators are found to be necessary.

Other Information: When using, do not eat, drink, or smoke.

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES

Information on Basic Physical and Chemical Properties

Physical State	: Liquid
Appearance	: Black
Odor	: Petroleum Distillates
Flash Point	: 100°F (41°C)
Lower Flammable Limit	: 1.0%
Upper Flammable Limit	: 7.0%
Vapor Pressure	: 5 mmHg
Specific Gravity	: 0.96
Solubility	: Insoluble
Explosion Data – Sensitivity to Mechanical Impact	: Not expected to present an explosion hazard due to mechanical impact
Volatile Organic Compounds	: 450 g/L

SECTION 10: STABILITY AND REACTIVITY

Reactivity: Hazardous reactions will not occur under normal conditions.

Chemical Stability: Flammable liquid and vapor. Product is stable under recommended handling and storage conditions (see Section 7).

Possibility of Hazardous Reactions: Hazardous polymerization will not occur.

BITEC Asphalt Primer 41

Safety Data Sheet

According to Federal Register/Vol. 77, No. 58/Monday, March 26, 2012/Rules and Regulations

Conditions to Avoid: Direct sunlight. Extremely high or low temperatures. Ignition sources. Incompatible materials.

Incompatible Materials: Strong acids. Strong bases. Strong oxidizers.

Hazardous Decomposition Products: Carbon oxides (CO, CO₂). May release flammable gases. Contains a small amount of hydrogen sulfide. Hydrogen sulfide is a fatal, and highly flammable gas with a rotten egg odor that quickly causes odor fatigue. Heating of this product and storage under elevated temperatures or over long periods of time may release higher amounts of hydrogen sulfide. Hydrogen sulfide is also an asphyxiate.

SECTION 11: TOXICOLOGICAL INFORMATION

Information On Toxicological Effects - Product

Acute Toxicity: Not classified

LD50 and LC50 Data: Not available

Skin Corrosion/Irritation: Not classified

Serious Eye Damage: Causes serious eye irritation.

Respiratory or Skin Sensitization: Not classified.

Germ Cell Mutagenicity: May cause genetic defects.

Teratogenicity: Not available

Carcinogenicity: May cause cancer (inhalation).

Specific Target Organ Toxicity (Repeated Exposure): May cause damage to organs through prolonged or repeated exposure.

Reproductive Toxicity: Not classified.

Aspiration Hazard: May be fatal if swallowed and enters airways.

Specific Target Organ Toxicity (Single Exposure): Not classified

Symptoms/Injuries After Inhalation: May cause respiratory irritation.

Symptoms/Injuries After Skin Contact: May cause skin irritation.

Symptoms/Injuries After Eye Contact: Causes serious eye irritation.

Symptoms/Injuries After Ingestion: May be fatal if swallowed and enters airways.

Chronic Symptoms: May cause cancer. May cause genetic damage.

Information on Toxicological Effects – Ingredient(s)

LD50 and LC50 Data

Petroleum Asphalt (8052-42-4)	
LD50 Oral Rat	> 5000 mg/kg
LD50 Dermal Rabbit	> 2000 mg/kg

Solvent naphtha, petroleum, light aromatic (64742-95-6)	
LD50 Dermal Rat	>2,000 mg/kg
LC50 Inhalation Rabbit	3,400 ppm/4 h

Benzene, 1,2,4-trimethyl- (95-63-6)	
LD50 Oral Rat	6000 mg/kg
LD50 Dermal Rabbit	> 3160 mg/kg
LC50 Inhalation Rat	18 g/m ³ (Exposure time: 4 h)

1,3,5-trimethylbenzene (108-67-8)	
LC50 Inhalation Rat	24 g/m ³ (Exposure time: 4 h)

Stoddard solvent (8052-41-3)	
LD50 Oral Rat	> 5 g/kg Behavioral somnolence
LD50 Dermal Rabbit	> 3 mg/kg

Hydrogen sulfide (7783-06-4)	
LC50 Inhalation Rat	0.99 mg/L (Exposure time: 1 h)
LC50 Inhalation Rat	444 ppm/4 h

Carcinogenicity Data:

Petroleum Asphalt (8052-42-4)	
IARC Group	2B
National Toxicity Program (NTP) Status	Twelfth Report – Items under consideration

SECTION 12: ECOLOGICAL INFORMATION

BITEC Asphalt Primer 41

Safety Data Sheet

According to Federal Register/Vol. 77, No. 58/Monday, March 26, 2012/Rules and Regulations

Toxicity

Ecology – General: Very toxic to aquatic life with long lasting effects.

Solvent naphtha, petroleum, light aromatic (64742-95-6)	
LC50 Fish 1	9.22 mg/l (Exposure time: 96 h - Species: Oncorhynchus mykiss)
EC50 Daphnia 1	6.14 mg/l (Exposure time: 48 h - Species: Daphnia magna)
Hydrogen sulfide (7783-06-4)	
LC50 Fish 1	0.0448 mg/l (Exposure time: 96 h - Species: Lepomis macrochirus [flow-through])
LC 50 Fish 2	0.016 mg/l (Exposure time: 96 h - Species: Pimephales promelas [flow-through])
Stoddard solvent (8052-41-3)	
EC50 Daphnia 1	0.42 mg/l
1,3,5-Trimethylbenzene (108-67-8)	
LC50 Fish 1	3.48 mg/l (Exposure time: 96 h - Species: Pimephales promelas)
Benzene, 1,2,4-trimethyl- (95-63-6)	
LC50 Fish 1	7.19 (7.19 - 8.28) mg/l (Exposure time: 96 h - Species: Pimephales promelas [flow-through])
EC50 Daphnia 1	6.14 mg/l (Exposure time: 48 h - Species: Daphnia magna)

Bioaccumulative Potential

Asphalt (8052-42-4)	
BCF Fish 1	(no bioaccumulation expected)
Log Pow	> 6

Hydrogen sulfide (7783-06-4)	
BCF Fish 1	(no bioaccumulation expected)
Log Pow	0.45 (at 25 °C)

Stoddard solvent (8052-41-3)	
Log Pow	3.16 (Octanol/water partition coefficient 3.16/7.06)

Benzene, 1,2,4-trimethyl- (95-63-6)	
Log Pow	3.63

Mobility in Soil

No additional information available

Other Adverse Effects

Other Information: Avoid release to the environment.

SECTION 13: DISPOSAL CONSIDERATIONS

Waste Disposal Recommendations: Dispose of waste material in accordance with all local, regional, national, and international regulations.

Additional Information: Prevent runoff from entering drains, sewers, or waterways.

SECTION 14: TRANSPORT INFORMATION

In Accordance with DOT

Proper Shipping Name : Non-Regulated , non-bulk

In Accordance with IMDG

Proper Shipping Name : Tars, liquid

Hazard Class : 3

Identification Number : UN1999

Packing Group : III

EmS No. : F-E, S-E



In Accordance with IATA

Proper Shipping Name : Tars, liquid

Hazard Class : 3

Identification Number : UN1999



BITEC Asphalt Primer 41

Safety Data Sheet

According to Federal Register/Vol. 77, No. 58/Monday, March 26, 2012/Rules and Regulations

Packing Group : III
ERG Code : 130

In Accordance with TDG

Proper Shipping Name : Not Regulated, non-bulk

SECTION 15: REGULATORY INFORMATION

US Federal Regulations

SARA Section 311/312 Hazard Classes

Fire hazard
Immediate (acute) health hazard
Delayed (chronic) health hazard

Petroleum Asphalt (8052-42-4)

Listed on the United States TSCA (Toxic Substances Control Act) Inventory

Solvent naphtha, petroleum, light aromatic (64742-95-6)

Listed on the United States TSCA (Toxic Substances Control Act) Inventory

Hydrogen Sulfide (7783-06-4)

Listed on the United States TSCA (Toxic Substances Control Act) Inventory
Listed on the United States SARA Section 302
Listed on the United States SARA Section 313

SARA Section 302 Threshold Planning Quantity (TPQ)	500
SARA Section 312 – Emission Reporting	1.0%

1,3,5-trimethylbenzene (108-67-8)

Listed on the United States TSCA (Toxic Substances Control Act) Inventory

EPA TSCA Regulatory Flag	T – T – indicates a substance that is the subject of a Section 4 test rule under TSCA.
--------------------------	--

Stoddard solvent (8052-41-3)

Listed on the United States TSCA (Toxic Substances Control Act) inventory

Hydrocarbon Resin (68478-07-9)

Listed on the United States TSCA (Toxic Substances Control Act) Inventory

1,2,4-trimethylbenzene (95-63-6)

Listed on the United States TSCA (Toxic Substances Control Act) Inventory
Listed on United States SARA Section 313

SARA Section 313 – Emission Reporting	1.0%
---------------------------------------	------

US State Regulations

Petroleum Asphalt (8052-42-4)

RTK – U.S. – Massachusetts – Right To Know List
RTK – U.S. – New Jersey – Right To Know Hazardous Substance List
RTK – U.S. – Pennsylvania – RTK (Right To Know) List

Hydrogen sulfide (7783-06-4)

RTK – U.S. – Massachusetts – Right To Know List
RTK – U.S. – New Jersey – Right To Know Hazardous Substance List
RTK – U.S. – Pennsylvania – Right To Know Environmental Hazard List
RTK – U.S. – Pennsylvania – RTK (Right To Know) List

Stoddard Solvent (8052-41-3)

RTK – U.S. – Massachusetts – Right To Know List
RTK – U.S. – New Jersey – Right To Know Hazardous Substance List
RTK – U.S. – Pennsylvania – RTK (Right To Know) List

BITEC Asphalt Primer 41

Safety Data Sheet

According to Federal Register/Vol. 77, No. 58/Monday, March 26, 2012/Rules and Regulations

1,3,5-trimethylbenzene (108-67-8)

RTK – U.S. – Massachusetts – Right To Know List

1,2,4-trimethylbenzene (95-63-6)

RTK – U.S. – Massachusetts – Right To Know List

RTK – U.S. – New Jersey – Right To Know Hazardous Substance List

RTK – U.S. – Pennsylvania – RTK (Right To Know) List

RTK – U.S. – Pennsylvania – RTK (Right To Know) – Environmental Hazard List

Stoddard solvent (8052-41-3)

U.S. - Massachusetts - Right To Know List U.S. - New Jersey - Right to Know Hazardous Substance List U.S. - Pennsylvania - RTK (Right to Know) List

Canadian Regulations

BITEC Asphalt Primer 41

WHMIS Classification

Class B Division 3 – Combustible liquid

Class D Division 2 subdivision A – Very toxic material causing other effects.

Class D Division 2 Subdivision B – Toxic material causing other toxic effects



Petroleum Asphalt (8052-42-4)

Listed on the Canadian DSL (Domestic Substances List) Inventory

Hydrogen Sulfide (7783-06-4)

Listed on the Canadian DSL (Domestic Substances List) Inventory

Listed on the Canadian IDL (Ingredient Disclosure List)

WHMIS Classification

Class A – Compressed Gas

Class B Division 3 – Combustible Liquid

Class D Division 1 Subdivision A – Very toxic material causing immediate and serious toxic effects

Class D Division 2 Subdivision B – Toxic material causing other toxic effects

Stoddard solvent (8052-41-3)

Listed on the Canadian DSL (Domestic Substances List) Listed on the Canadian IDL (Ingredient Disclosure List)

IDL Concentration 1 %

WHMIS

Classification

Class B Division 3 - Combustible Liquid Class D Division 2 Subdivision B - Toxic material causing other toxic effects

1,3,5-trimethylbenzene (108-67-8)

Listed on the Canadian DSL (Domestic Substances List) Inventory

Listed on the Canadian IDL (Ingredient Disclosure List)

IDL Concentration 0.1%

WHMIS Classification

Class B Division 3 – Combustible Liquid

Solvent naphtha, petroleum, light aromatic (64742-95-6)

Listed on the Canadian DSL (Domestic Substances List) Inventory

WHMIS Classification

Class B Division 3 – Combustible Liquid

Class D Division 2 Subdivision B – Toxic material causing other toxic effects

Hydrocarbon Resin (68478-07-9)

Listed on the Canadian DSL (Domestic Substances List) Inventory

BITEC Asphalt Primer 41

Safety Data Sheet

According to Federal Register/Vol. 77, No. 58/Monday, March 26, 2012/Rules and Regulations

1,2,4-trimethylbenzene (95-63-6)	
Listed on the Canadian DSL (Domestic Substance List) Inventory	
IDL Concentration 0.1%	
WHMIS Classification	Class B Division 3 – Combustible Liquid Class D Division 2 Subdivision A – Very toxic material causing other toxic effects. Class D Division 2 Subdivision B – Toxic material causing other toxic effects.
This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the SDS contains all of the information required by CPR.	

SECTION 16: OTHER INFORMATION, INCLUDING DATE OF PREPARATION OR LAST REVISION

Revision date : 12/12/2025

Other Information : This document has been prepared in accordance with the SDS requirements of the OSHA Hazard Communication Standard 29 CFR 1910.1200.

Party Responsible for the Preparation of This Document

BITEC, Inc.
#2 Industrial Park Drive
Morrilton, AR 72110
T-800-535-8597

This information is based on our knowledge as of the Revision Date and is intended to describe the product only for the purposes of health, safety, and environmental requirements as of the Revision Date. It should not therefore be construed as guaranteeing any specific property of the product nor as providing any warranty, expressed or implied. The user assumes all responsibility, liability, risk of loss, damage, or expense arising out of, or in any way connected with, the handling, storage, use, or disposal of the product.

North America GHS US 2019 & WHMIS